


- 25MP resolution @4.64 fps
- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Compatible with GigE Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard
- Support Windows、Linux
- Up to 128 MB local memory for burst transmission and retransmission



**Applied range** • Defect Detection • Surface Patch Detection • Visual Positioning • Size Measuring • QR Code Reading • VR/AR • Logistics


Camera	LEO 25MP-5gm/gc
Resolution [H*V]	5120 × 5120
Sensor	ON Semiconductor PYTHON25K
Sensor Size	23 mm × 23 mm
Sensor Technology	Global, CMOS
Pixel Size [μm]	4.5 × 4.5
Frame Rate [fps]	4.64
Data Bit	8bit / 10bit / 12bit
Exposure Time	80μs~10s
Dynamic Range	58dB
Mono/Color	Mono/Color
Image Format	Monochrome: Mono8/10/10p/12/12p Color: Mono 8/10/12,Bayer RG 8/10/10p/12/12p, YUV422Packed,YUV422_YUYV_Packed
Interface	GigE
Synchronization	Via hardware trigger、software trigger or free run mode
Programmable Control [ISP]	Image resolution、RGB gain、Exposure time、Contrast ratio、Gamma form、Image rollovers、Raw、LUT、Black level correction
Housing Size [L*w*h]	M58(With fan):74 × 74 × 72.7 mm (550g) F (With fan):74 × 74 × 78.7 mm(600g)
Operating Temperature	-30~70 ° C (Storage), 0~50° C (Working)
Lenses Mount	M58, BFL 11.48 mm F-Mount, BFL 46.5mm
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, and bi-directional custom non-isolated I/O x 1, RS232 x 1,Full-duplex RS485 x 1
Power Input	DC 12V
Power Consumption	Monochrome: 12V @6.7W Color: 12V @7.8W
Driver	LEO Series Camera Software Suite (iDatum) or 3rd party GigE Vision Software
Operating System	Windows, Linux
Conformity	GigE Vision, GenICam

### Spectral Response

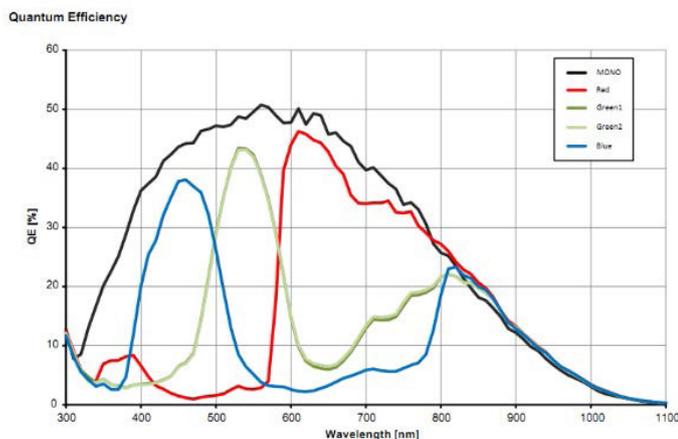


### Dimensions

M58(Without fan):

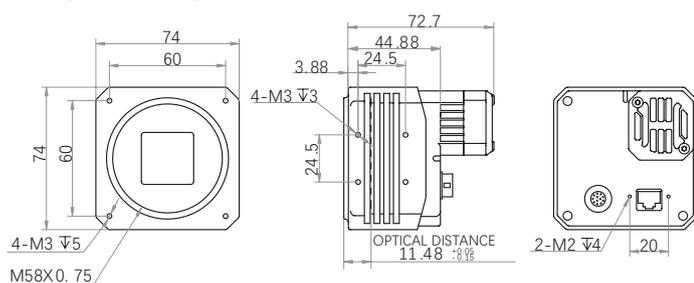

F-Mount(With fan):

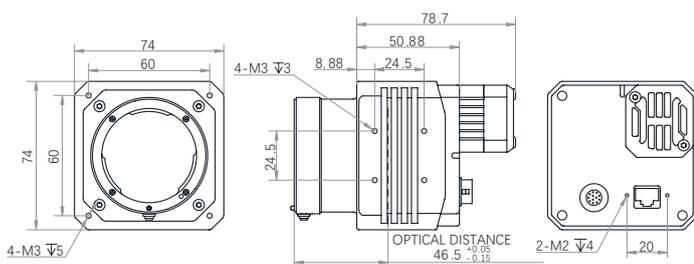

No.8, Xiyuan 9th Road West Lake District, Hangzhou 310030 China  
Tel: 86-571-89712238 Web: www.contrasTech.com  
Email: market@contrasTech.com